


POWERFUL FLOOR SAW FOR THE TOUGHEST BUILDING SITE USE

- Powerful floor saw with scissor technology
- Simple arrangement of the operating elements and a compact multifunctional display facilitate the easy to learn and intuitive operation
- Drive via Hydrostat guarantees a smooth and controlled operation of the machine
- Optimum power transfer with high performance V-belts
- Gearbox with clockwise/counter-clockwise rotation and neutral position
- Warp-resistant sheet frame construction
- The compact design and balanced chassis permit easy manoeuvring around the construction site
- The low centre of gravity ensures a precise saw cut
- Very good straight cut thanks to the adjustable rear axle
- Same track of the wheels- large- dimensioned wheels
- Lifting and lowering of the saw blade is controlled electro-hydraulically
- Height adjustable handles allow for ergonomic operation
- Rapid changeover from left to right-hand cutting
- Easy access for prevalent maintenances (air filter, battery, oil filter, fuel filter) due to the perfect drive unit position
- Parking brake, working hour counter and neutral (free-wheeling) mode come as a standard feature
- Fast and simple v-belt change enables a second rotation speed. Change to other rotation speeds by removing/ inserting the saw blade shaft
- The MULTICUT 600 complies with the current emission regulations US EPA Tier 4 final/EU Stage IIIB

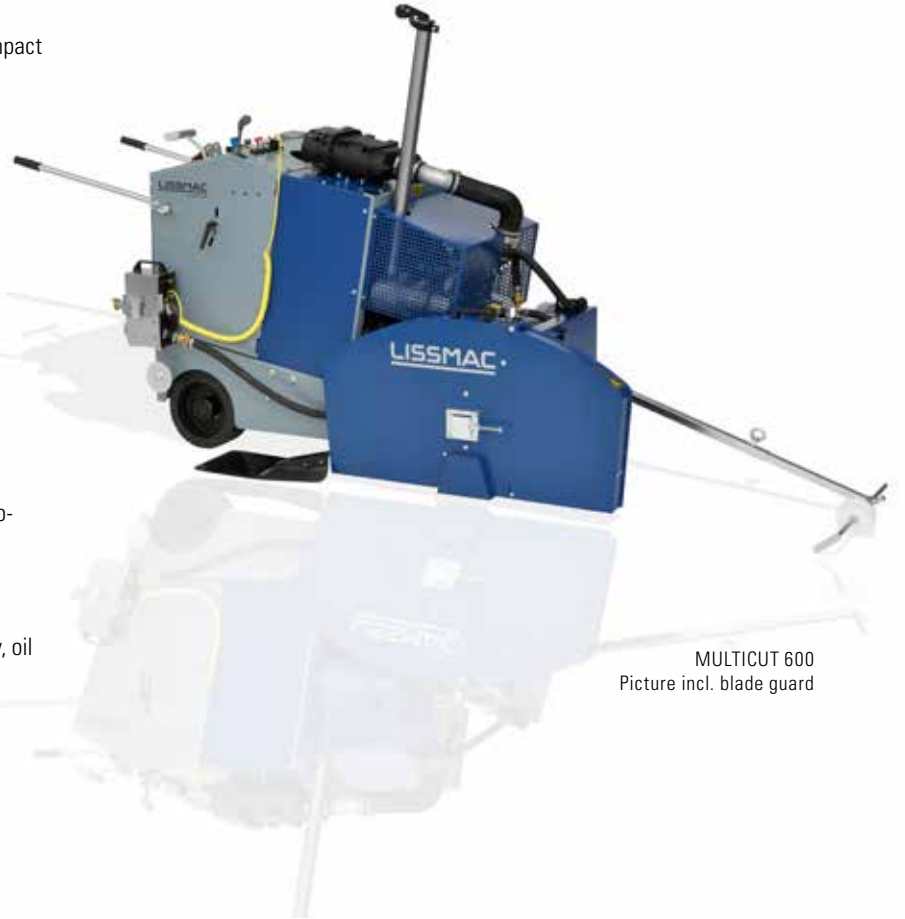

MULTICUT 600
Picture incl. blade guard

Basic version MULTICUT 600 SG:

Shift gearbox with 3 different rpm speeds – 950, 1620 and 2450 1/min, gearbox (clockwise/counter-clockwise rotation and neutral position), flange spraying system



[1] Blade guard incl. vacuum shoe



[2] Spot-light



[3] Warning flasher

| TECHNICAL DATA | MULTICUT 600 G | MULTICUT 600 SG |
|-----------------------|---------------------------------------|--------------------------------------|
| cutting depth max. | 515 mm | 515 mm |
| cutting depth setting | electro hydraulic/smoothly adjustable | |
| saw blade Ø max. | 1200 mm | 1200 mm |
| saw blade holder | 25.4 or 35 mm (6 x M12 - TK120 mm) | |
| cutting gear forward | hydrostatic stepless 0-50 m/min | hydrostatic stepless 0-50 m/min |
| cutting gear reverse | hydrostatic stepless 0-25 m/min | hydrostatic stepless 0-25 m/min |
| drive motor | HATZ diesel 4-cylinder | HATZ diesel 4-cylinder |
| output power max. | 55 kW, 74.8 hp | 55 kW, 74.8 hp |
| saw blade speed | 1550 1/min.; 970 1/min. | 950 1/min.; 1620 1/min.; 2450 1/min. |
| dimensions (L/W/H) | 1580/1050/1690 mm | 1580/1050/1690 mm |
| weight | 930 kg | 1070 kg |
| left/right cut | yes | yes |

DIAMOND TOOLS RECOMMENDATION

| | |
|----------|---------|
| Asphalt | ASP 703 |
| Concrete | BSP 501 |

| FLOOR SAWS | NR. |
|-----------------------------------------------------------------|---------|
| MULTICUT 600 G 25,4 without diamond blade, without blade guard | 1029309 |
| MULTICUT 600 SG 25,4 without diamond blade, without blade guard | 1030812 |
| MULTICUT 600 G 35 without diamond blade, without blade guard | 1017778 |
| MULTICUT 600 SG 35 without diamond blade, without blade guard | 1029462 |

| ACCESSORIES | NR. |
|---------------------------------------------------------------------|---------|
| MULTICUT 600 G / SG - vacuum unit VACUUM-WET 100 P | 818167 |
| MULTICUT 600 G / SG - blade guard 800 mm | 1031207 |
| MULTICUT 600 G / SG - blade guard 1000 mm | 1031208 |
| MULTICUT 600 G / SG - blade guard 1200 mm | 1031209 |
| [1] MULTICUT 600 G / SG - blade guard 500 mm incl. vacuum shoe | 1004709 |
| [1] MULTICUT 600 G / SG - blade guard 800 mm incl. vacuum shoe | 816187 |
| [2] MULTICUT 600 G / SG - spot-light LED 12 V | 1040256 |
| [3] MULTICUT 600 G / SG - warning flasher | 816002 |
| MULTICUT 600 G / SG - water pump set incl. water filter | 813046 |
| MULTICUT 600 G - rpm speed kit 1550/2500 1/min Ø 35 mm | 1018640 |
| MULTICUT 600 G / SG - adapter kit - shaft 25,4 mm for 6-hole flange | 1018697 |
| MULTICUT 600 G / SG - weight plates set incl. holder 100 kg | 1018646 |
| MULTICUT 600 G / SG - diesel particulate filter incl. mounting | 1016063 |
| MULTICUT 600 G / SG - individual color | 910050 |